



T2

**100% Wire-Free Open/Close Detector
(must be paired with the A1)**

Protect what's valuable to you with the T2.



Maximum security

Triggered when a door or window is opened.



Low power consumption

The ultra-low power consumption design allows for up to two years of battery life.



Flexible installation

The T2 is designed for easy installation on doors and windows.



Two modes

Switch between two modes to suit your needs.
In "At Home" mode, the T2 acts as a doorbell.
In "Away" mode, the T2 acts as a guard to protect your house.



Instant alerts

Whenever the T2 is triggered, the A1 sends an instant alert to the app on your smartphone.




Integrated solution

The A1 can be connected to your EZVIZ cameras. When the T2 is triggered, the camera instantly starts recording images and video.



Control via the EZVIZ App

With the EZVIZ App, you can remotely control the T2 and all devices connected to it even when you are away from home.

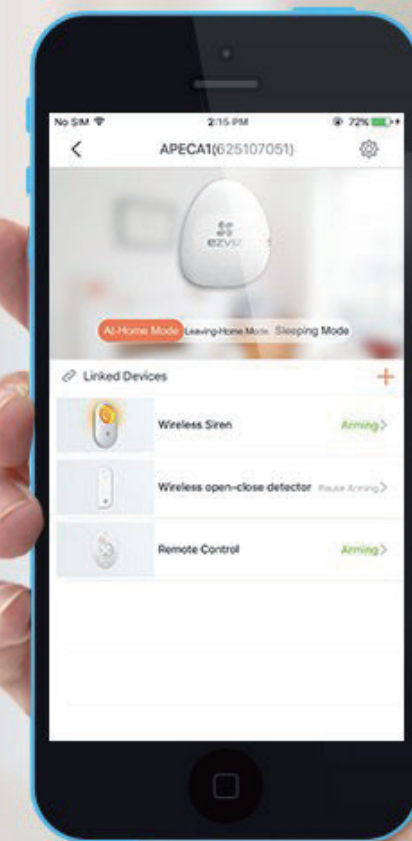

Specifications Model CS-T2-A

Specification

| | |
|----------------------|---|
| Working Frequency | According to regulations: Euro version 868MHz/ Asia verison 433MHz/ US version 915MHz |
| Trigger Distance | 30mm±5mm |
| Restoration Distance | 25mm±5mm |

Other

| | |
|----------------------|----------------------------------|
| Battery Type | CR2450 |
| Standby Time | 2 Years |
| Working Voltage | 3V |
| Working Current | Static≤20μA : Maximum≤40mA |
| Transmit Power | ≤10dBm |
| Product Dimensions | 71.9×50×18.5mm(2.83×1.97×0.73in) |
| Packaging Dimensions | 103 x 86 x 26mm |
| Weight | 30g (0.07lb) |

Package Contents:

- T2 x 1
- Foam Sticker x 2
- Quick Start Guide x 1

Certificates

CE/RoHS/REACH/WEEE

Requirements

- Operating Conditions: -10°C ~ 55°C, Humidity 10% - 90%

