

Box Content



Solar Panel (x1)



Adjustable Mounting Bracket (x1)



Screw Kit (x1)



Quick Start Guide (x1)



Drill Template (x1)


Installation

You can install the solar panel on the wall or ceiling.

- i** CAUTION: As an alternative charging equipment, the power amount generated by this solar panel may be affected by its actual surrounding environment, mainly the intensity of sunlight and the time length of illumination. If the battery camera is running out of power soon, please bear it in mind that this solar panel alone cannot ensure the camera remains in working status.

1 Install the bracket


- Place drill template onto a clean and flat surface.
- **(For the cement wall/ceiling only)** Drill screw holes according to the template, and insert anchors.
- Use three screws to fix the bracket.



- i** When drilling holes for expansion bolts, please make sure that the diameter of the drill head is 5.5mm to 6mm, and that the hole depth is not less than 25mm.

2 Install the Solar Panel

- Mount the solar panel on the bracket.
- Tighten the fixing screw.




3 Adjust the Angle

- Loosen the adjusting screw.
- Adjust the solar panel angle as your desired place.
- Tighten the adjusting screw when you have the solar panel in the position you want.

- i** • Please do not place the solar panel completely parallel to the ground to avoid dust or other dirt.
- The solar panel should be tilted to receive maximum solar radiation and the recommended tilt angle is 25°-40°.

4 Charge the Battery Camera

- Connect it with battery camera.

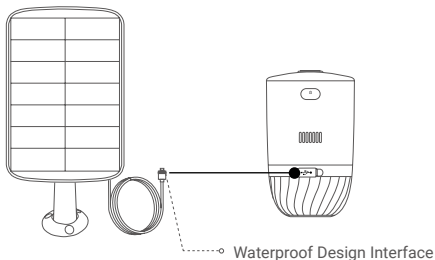

- i** • In accordance with safety and regulatory requirements, the working environment temperature range for battery charging should be maintained at 0-45°C.